
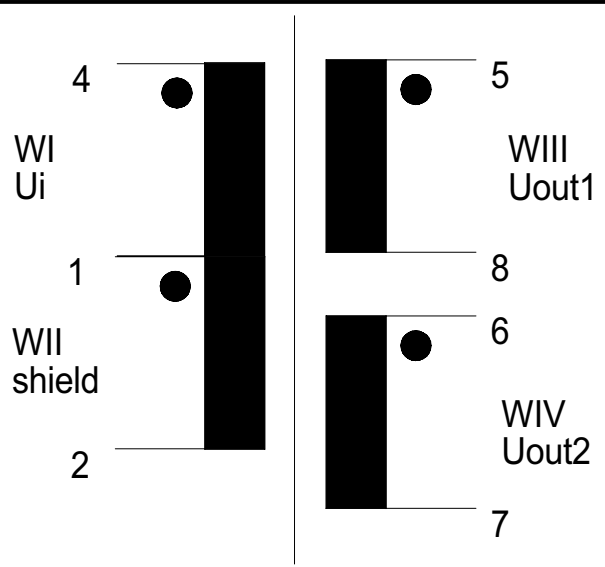


Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 16/5

Customer part no.:
SKNY255-9-4

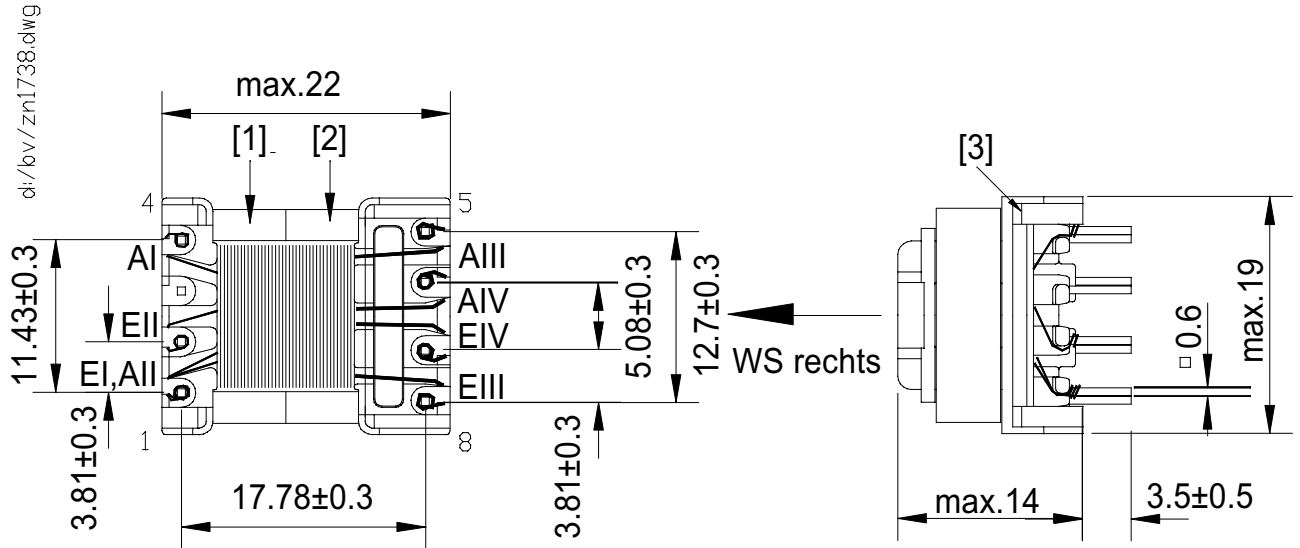

Core / material / air gap / AL	E 16/5 K 2006 or equiv.	
Nominal inductance	LI=1,55mH±15%	
maximum transmissible power		
Working frequency	44 - 132 KHz	
Transformation ratio	10,6:6:1:1	
dielctric strength (50Hz/2s)	4,0kVeff/50Hz/1sec	
Nominal Current		
Design in comp. with standard	EN60950 / EN61558	
Working / storage temperature	-25°C- +115°C	-25°C- +85°C
Miscellaneous	F (DIN 40040)	
leakage inductance	max. 200 µH	

Remarks : a.) marking

Measuring device of L: **W&K 3260A** Measuring conditions of L: **50mV/10kHz/22,5°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person: **Uwe Dickhut** Date: **..** Design regulation no: **063.932** Index: **00**

PLEASE GIVE US YOUR WRITTEN RELEASE
Date Signature