
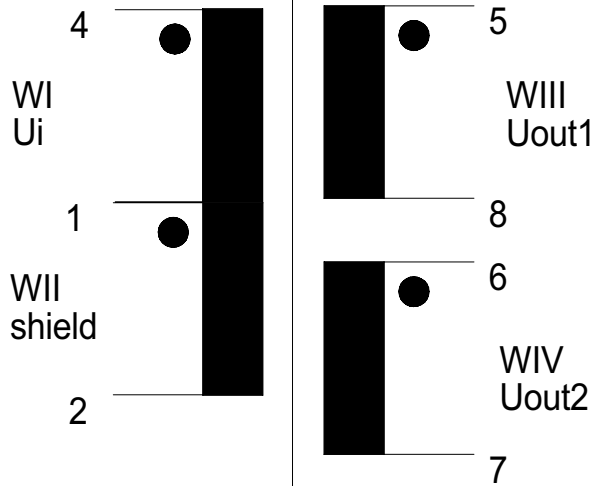


Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 16/5

Customer part no.:
SKNY256-5-6.5

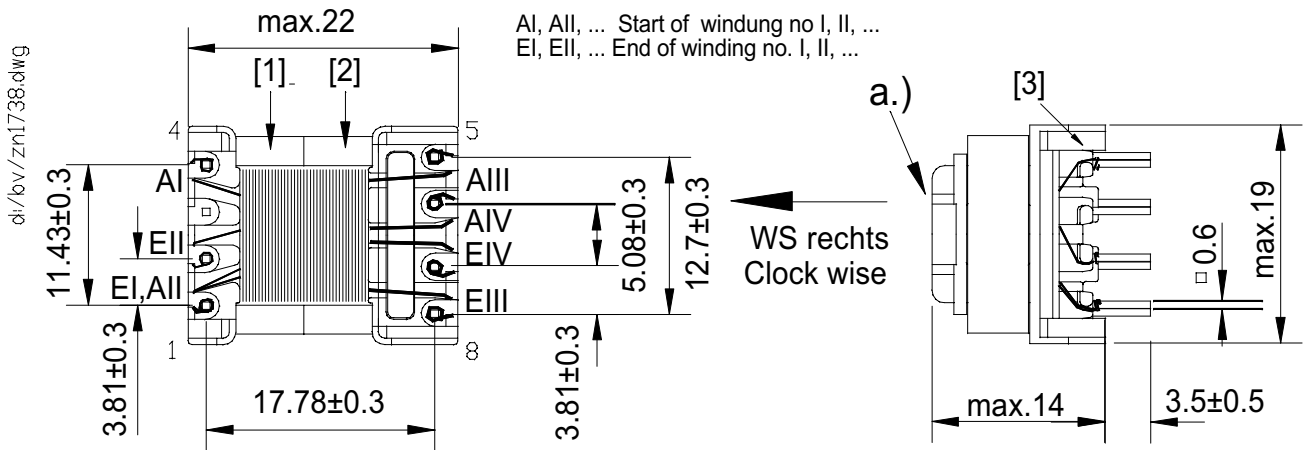

Core / material / air gap / AL	E 16/5 K2006 or equiv.	
Nominal inductance	LI = 0,89mH ± 10%	
maximum transmissible power	10 W (50°C)	
Working frequency	44 - 132 kHz	
Transformation ratio	19,2:9:1:1	
dielctric strength (50Hz/2s)	4 kVeff/50Hz/1sec.	
Nominal Current		
Design in comp. with standard	EN60950/EN61558	
Working / storage temperature	-25°C- +115°C	-25°C- +85°C
Miscellaneous	F (DIN 40040)	
leakage inductance	ting 268-uni	

Remarks : a.) marking

Measuring device of L: **W&K 4225**

Measuring conditions of L: **50mV/10kHz/22,5°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:
Uwe Dickhut

Date:
..

Design regulation no:
063.933

Index:
00

PLEASE GIVE US YOUR WRITTEN RELEASE

Date

Signature