
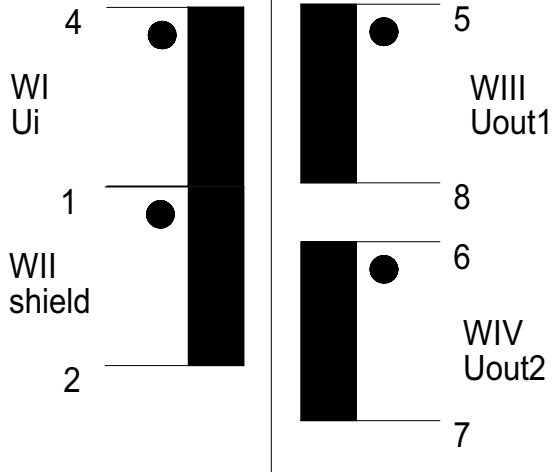


Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 16/5

Customer part no.:
SKNY256-9-6.5

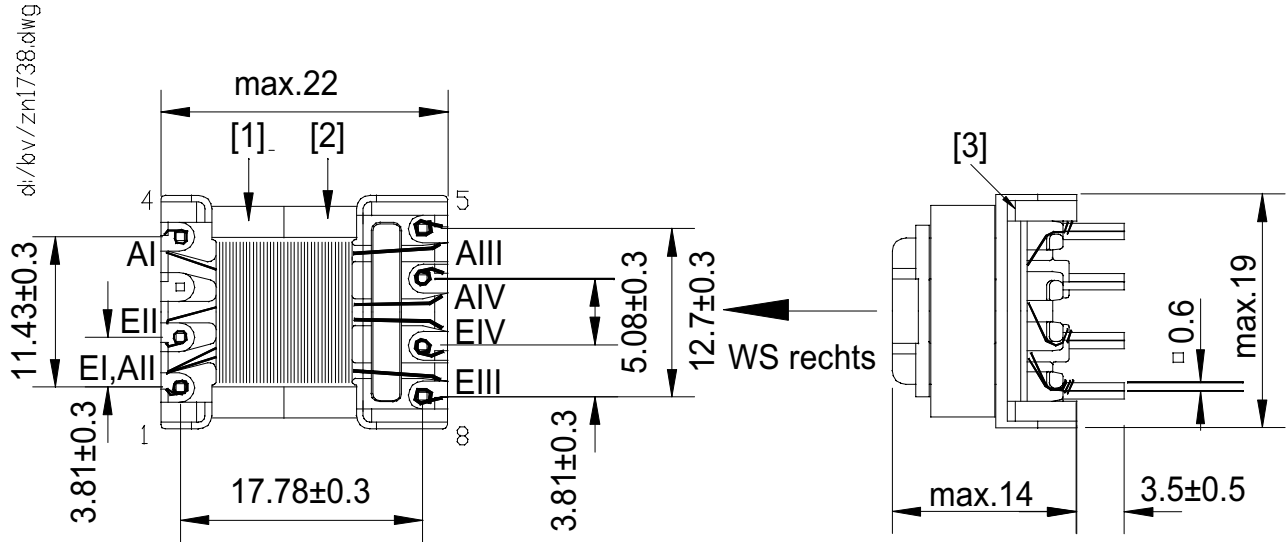

Core / material / air gap / AL	E 16/5 K2006 or equiv.	
Nominal inductance	LI = 0,89mH ± 10%	
maximum transmissible power	10 W	
Working frequency	44 - 132 kHz	
Transformation ratio	9,6:4,5:1:1	
dielctric strength (50Hz/2s)	4 kVeff/50Hz/2sec.	
Nominal Current		
Design in comp. with standard	EN60950/ EN61558	
Working / storage temperature	-25°C- +85°C	-25°C- +115°C
Miscellaneous	F (DIN 40040)	

Remarks : a.) marking

Measuring device of L: **W&K 4225** Measuring conditions of L: **50mV/10kHz/22,5°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person: **Uwe Dickhut** Date: **..** Design regulation no: **063.934** Index: **01**

PLEASE GIVE US YOUR WRITTEN RELEASE
Date Signature