
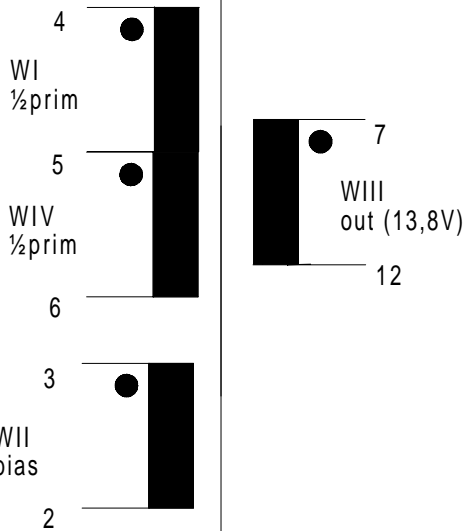


Customer:  
**Kaschke Göttingen**

Part designation:  
**SP-E 30/7**

Customer part no.:  
**SKOP247-14-48**

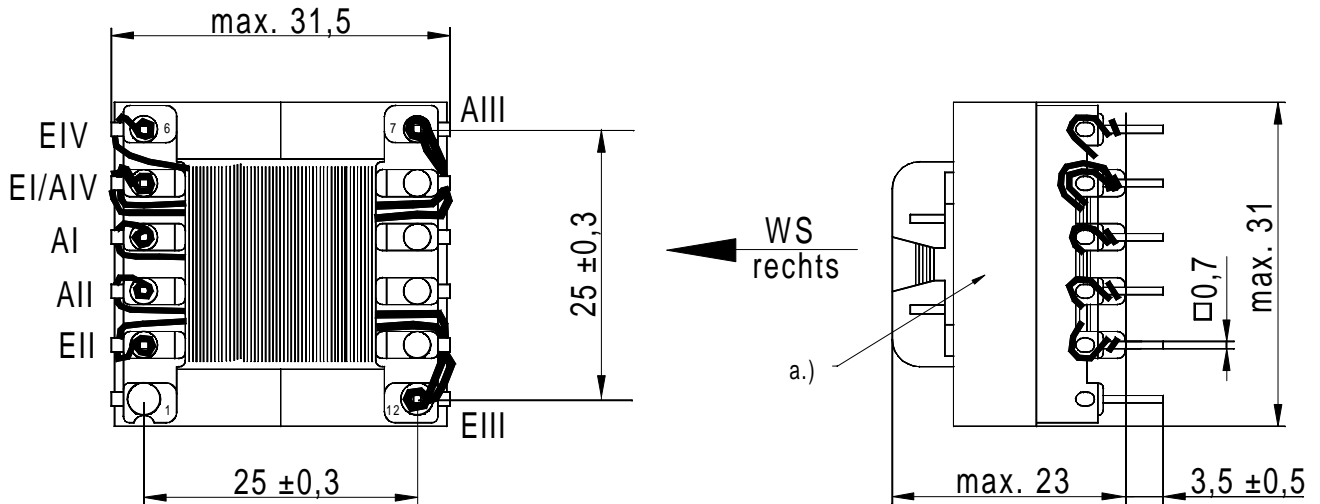

Core / material / air gap / AL	<b>E30/7 / K2006 or equiv. / 0,6</b>	
Nominal inductance	<b>LI+LIV = 930 µH ± 10%</b>	
maximum transmissible power	<b>48W (TOP247)</b>	
Working frequency	<b>132kHz</b>	
Transformation ratio	<b>42:8:9:42</b>	
dielctric strength (50Hz/2s)	<b>3,75 kV (WI/WII/WIV - WIII)</b>	
Nominal Current		
Design in comp. with standard	.	
Working / storage temperature	<b>-25°C- +115°C</b>	<b>-25°C- +85°C</b>
Miscellaneous	<b>F (DIN 40040)</b>	

Remarks : **a.) marking**  
**split primary**

Measuring device of L **W&K 3260A**

Measuring conditions of L: **50mV/10KHz/25°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:

**Uwe Dickhut**

Date:

..

Design regulation no:

**066.932**

Index:

**a**

**PLEASE GIVE US YOUR WRITTEN RELEASE**

Date

Signature