
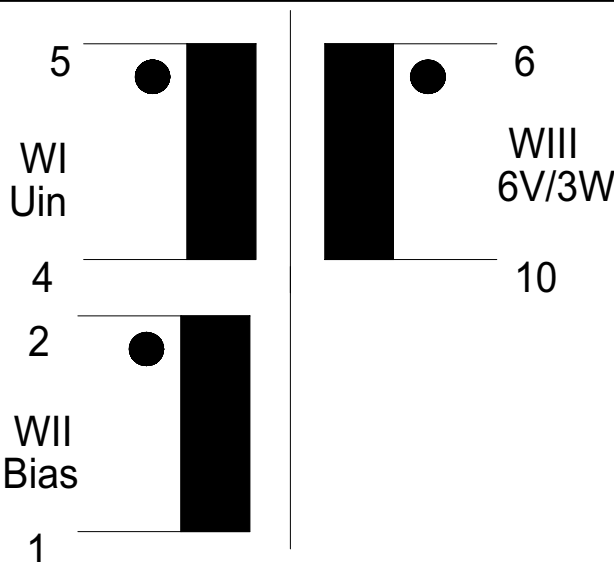


Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 13/4

Customer part no.:
SLNK520-6V-3

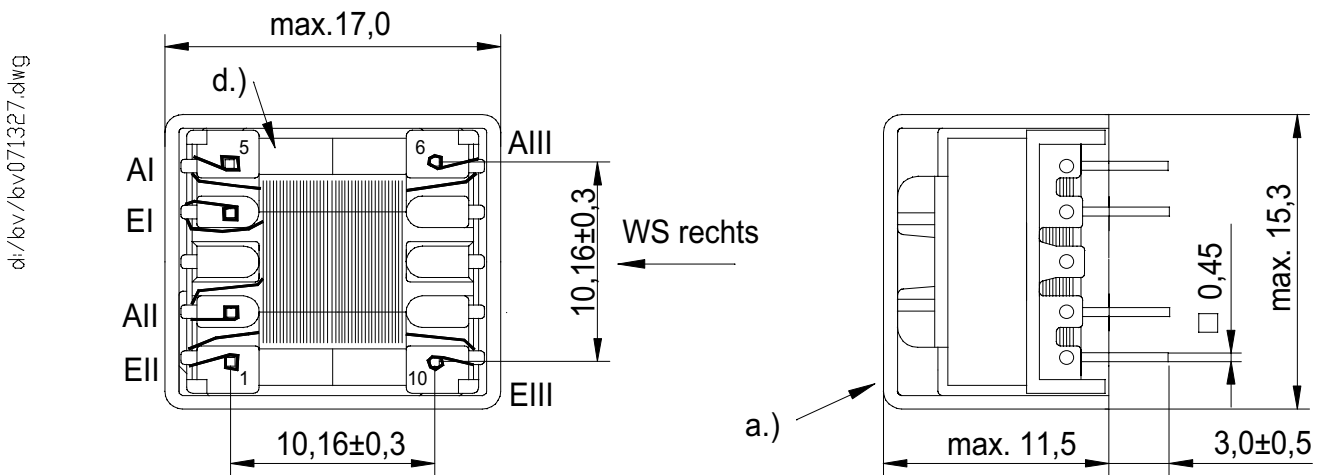

Core / material / air gap / AL	E13/4 K2006 or equiv.	
Nominal inductance	LI= 3,06mH ±10%	
maximum transmissible power	3W (50°C)	
Working frequency	42 kHz	
Transformation ratio	8,75:2,55:1	
dielctric strength (50Hz/2s)	prim-sec:3,5KVeFF	
Nominal Current		
Design in comp. with standard	S08	
Working / storage temperature	-25°C- +125°C	-25°C- +85°C
Miscellaneous	F (DIN 40040)	
switcher	link 520-uin	

Remarks : **a.) marking**

Measuring device of L: **W&K 3260A**

Measuring conditions of L: **50mV/10KHz/22,5°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:
Uwe Dickhut

Date:
. .

Design regulation no:
071.522

Index:
a

PLEASE GIVE US YOUR WRITTEN RELEASE

Date

Signature