


# Technical Data Sheet


Customer:  
**Kaschke Göttingen**

Part designation:  
**SP-E 13/4**

Customer part no.:  
**Type**

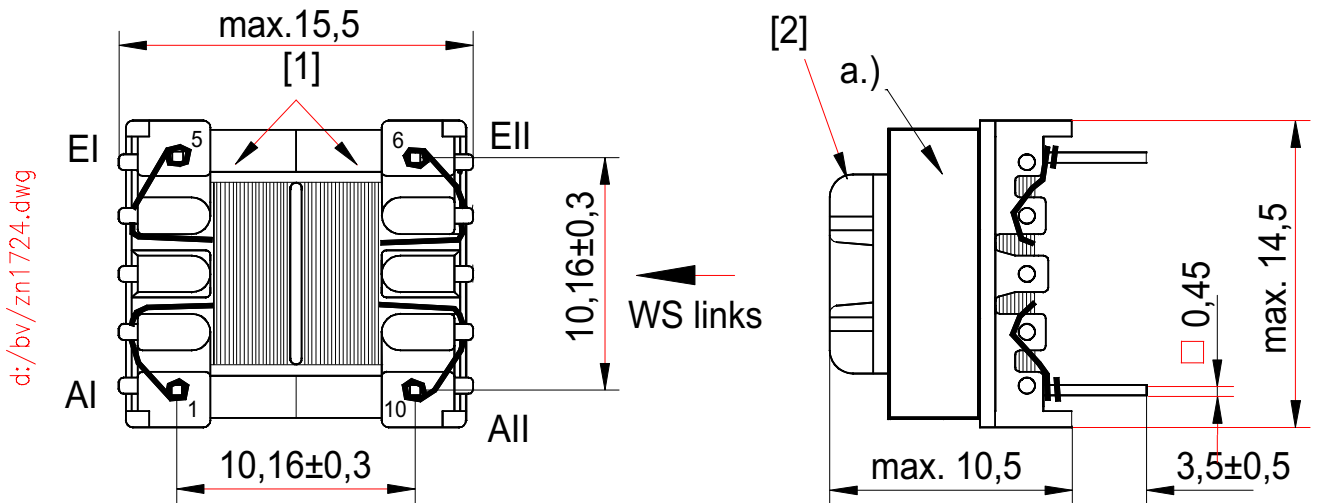

dt:/bv/zn1724.dwg

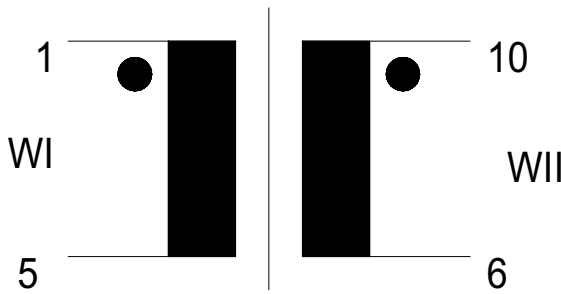

Core / material / air gap / AL	<b>E 13/4 K4000 or equiv.</b>	
Nominal inductance	<b>2 x 22mH±30%</b>	
maximum transmissible power		
Working frequency		
Transformation ratio	<b>1:1</b>	
dielctric strength (50Hz/2s)	<b>prim-sec:0,5KVe<sub>eff</sub></b>	
Nominal Current	<b>0,28 A</b>	
Design in comp. with standard	<b>S06</b>	
Working / storage temperature	<b>-25°C- +125°C</b>	<b>-25°C- 85°C</b>
Miscellaneous	<b>F (DIN 40040)</b>	
R DC	<b>max. 3 Ohm</b>	

Remarks : a.) marking

Measuring device of L: **W&K 3245**

Measuring conditions of L: **50 mV/10 KHz**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:  
**Uwe Dickhut**

Date:  
..

Design regulation no:  
**071.923**

Index:  
**00**

**PLEASE GIVE US YOUR WRITTEN RELEASE**

Date

Signature