
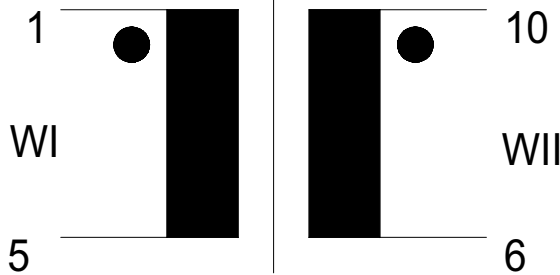


Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 13/4

Customer part no.:
CM-0,24-33

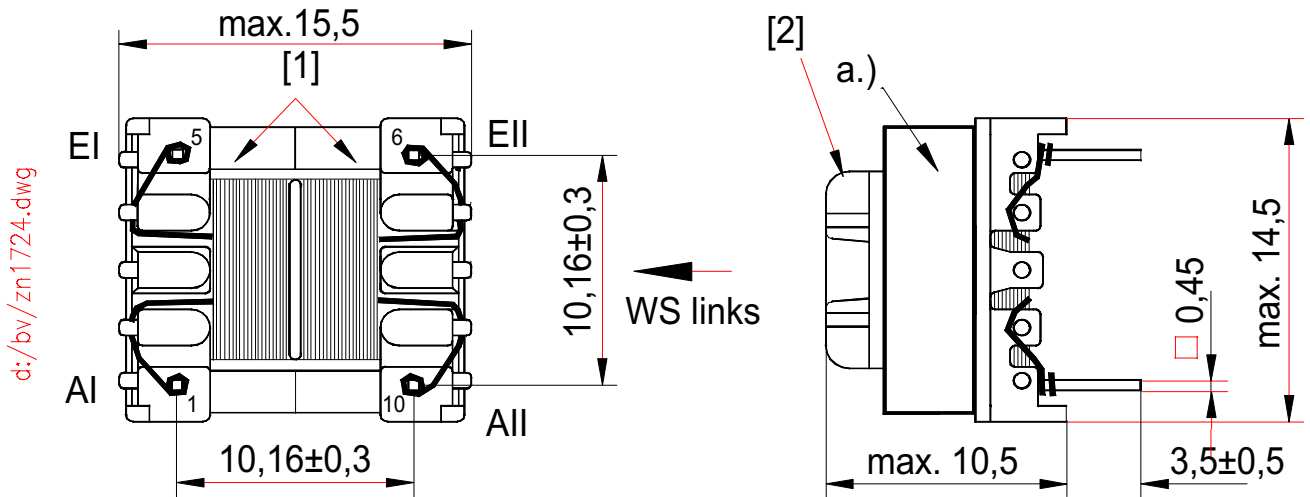

Core / material / air gap / AL	E 13/4 K4000 or equiv.	
Nominal inductance	2 x 33mH±30%	
maximum transmissible power		
Working frequency		
Transformation ratio	1:1	
dielectric strength (50Hz/2s)	prim-sec:0,5KVe_{eff}	
Nominal Current	0,24 A	
Design in comp. with standard	S06	
Working / storage temperature	-25°C- +125°C	-25°C- 85°C
Miscellaneous	F (DIN 40040)	
R DC	max. 4 Ohm	

Remarks : a.) marking

Measuring device of L: **W&K 3245**

Measuring conditions of L: **50 mV/10 KHz**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:
Uwe Dickhut

Date:
..

Design regulation no.:
071.925

Index:
a

PLEASE GIVE US YOUR WRITTEN RELEASE

Date

Signature