
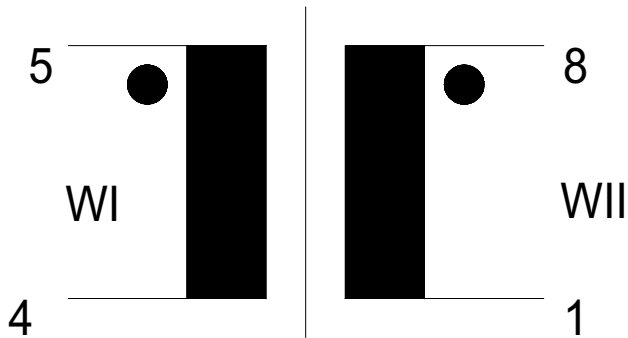


Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 16/5

Customer part no.:
CM-0,6-15mH

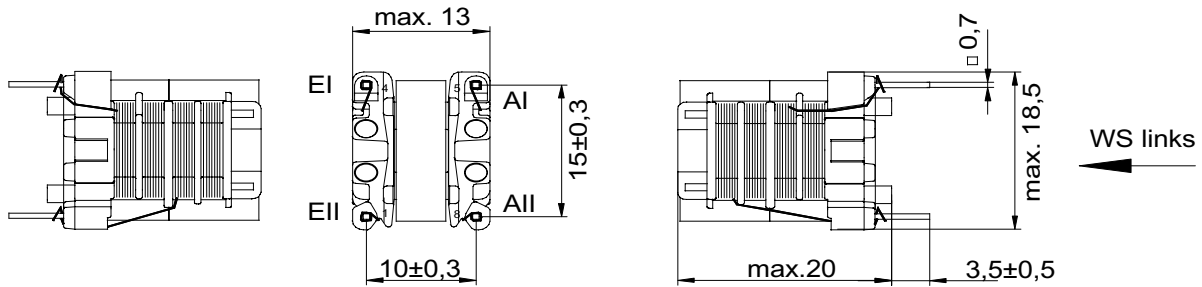

Core / material / air gap / AL	EF16/5 K6000 or equiv.	
Nominal inductance	L=2x15mH ±30%	
maximum transmissible power		
Working frequency		
Transformation ratio	1 : 1	
dielctric strength (50Hz/2s)	WI-WII=1,5kV	
Nominal Current	0,6 A	
Design in comp. with standard	S06	
Working / storage temperature	-25°C- 125°C	-25°C- 85°C
Miscellaneous	F (DIN 40040)	
R DC	max. 1 Ohm	

Remarks : a.) marking

Measuring device of L: W&K 3245				Measuring conditions of L: 50 mV/10 KHz		
Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person: **Uwe Dickhut** Date: **..** Design regulation no: **093.259** Index: **00**

PLEASE GIVE US YOUR WRITTEN RELEASE
Date Signature