Technical Data Sheet

Customer:	Part designation:	Customer part no.:
Kaschke Göttingen	**SP-E 16/5**	**SNK-3,3-3**

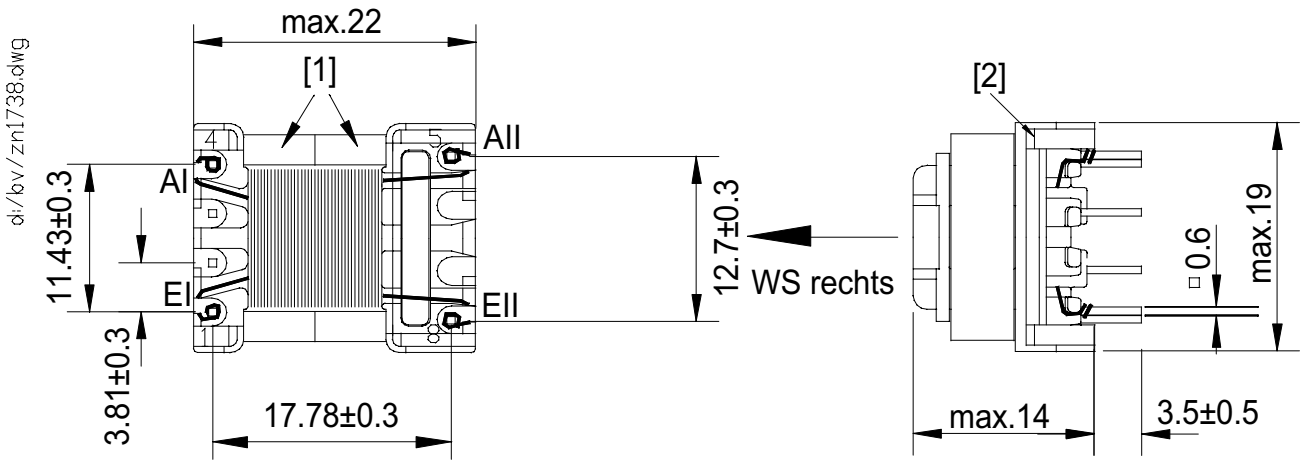

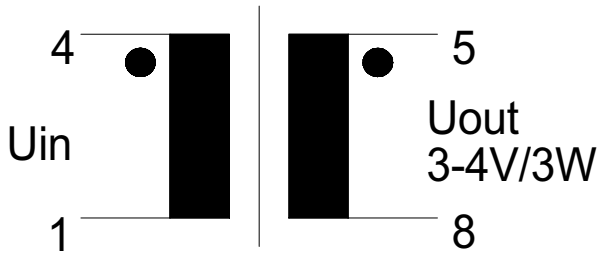

Core / material / air gap / AL	**E 16/5 K2006 or equiv.**	
Nominal inductance	**LI = 2,8 mH ± 15%**	
maximum transmissible power	**3W (50°C)**	
Working frequency	**44kHz**	
Transformation ratio		
dielctric strength (50Hz/2s)	**prim-sec:4KV**	
Nominal Current		
Design in comp. with standard	**EN60950/EN61558**	
Working / storage temperature	**-25°C- +115°C**	**-25°C- +85°C**
Miscellaneous	**F (DIN 40040)**	
switcher	**link 500/501-uni**	

Remarks : **creepage min.8mm**

Measuring device of L: **W&K 3260A** | Measuring conditions of L: **50mV/10kHz/22,5°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:	Date:	Design regulation no:	Index:
Uwe Dickhut	**. .**	**093.901**	**a**

PLEASE GIVE US YOUR WRITTEN RELEASE Date: _____ Signature: _____