
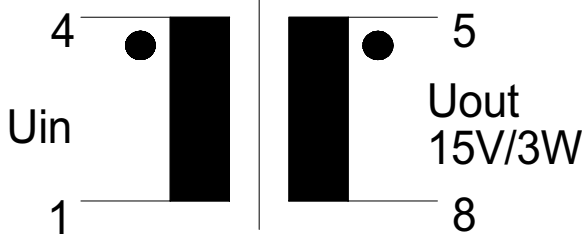


Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 16/5

Customer part no.:
SNK-15-3

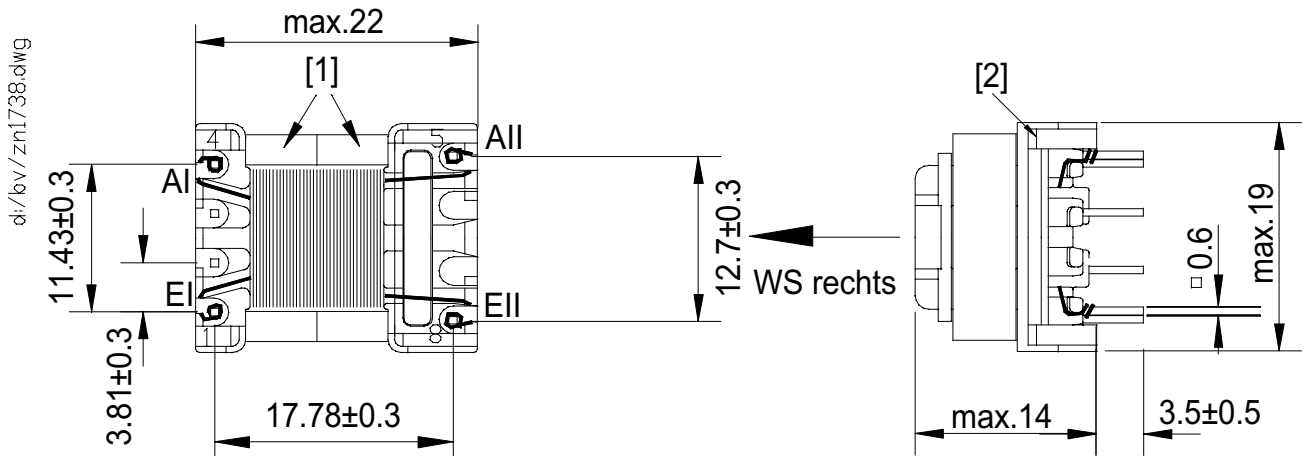

Core / material / air gap / AL	E 16/5 K2006 or equiv.	
Nominal inductance	LI = 2,8 mH ± 15%	
maximum transmissible power	3W (50°C)	
Working frequency	44kHz	
Transformation ratio		
dielectric strength (50Hz/2s)	prim-sec:4KV	
Nominal Current		
Design in comp. with standard	EN60950/EN61558	
Working / storage temperature	-25°C- +115°C	-25°C- +85°C
Miscellaneous	F (DIN 40040)	
switcher	link 500/501-uni	

Remarks : **creepage min.8mm**

Measuring device of L: **W&K 3260A**

Measuring conditions of L: **50mV/10kHz/22,5°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:

Uwe Dickhut

Date:

..

Design regulation no:

093.904

Index:

a

PLEASE GIVE US YOUR WRITTEN RELEASE

Date

Signature