



Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 20/6

Customer part no.:
SKOP-12-22

g:/bv/znl1843.dwg

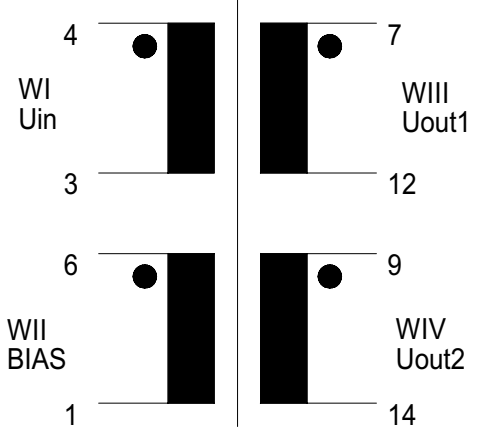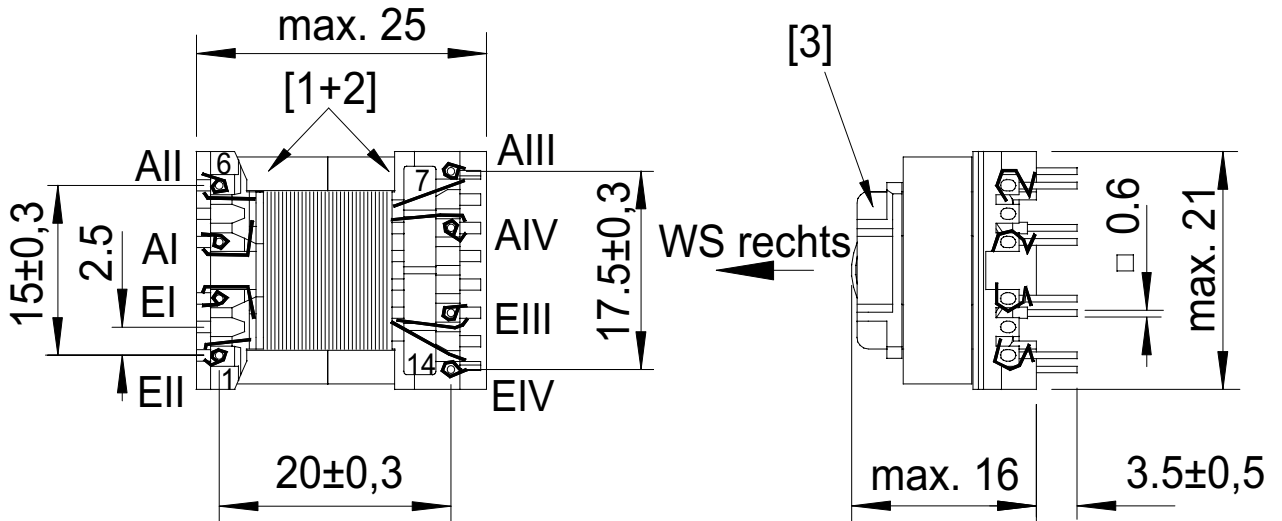

Core / material / air gap / AL	E20/6 / K2006 or equiv. / 0,3	
Nominal inductance	LI = 0,94mH ± 10%	
maximum transmissible power	22W (TOP243Y-univ.)	
Working frequency	132 kHz	
Transformation ratio	8,78 :1,11 : 1 : 1	
dielctric strength (50Hz/2s)	4kV (WI/WII - WIII/WIV)	
Nominal Current		
Design in comp. with standard	EN60950	
Working / storage temperature	-25°C- +115°C	-25°C- +85°C
Miscellaneous	F (DIN 40040)	

Remarks : **Uout1 = Uout2 = 9V-15V**
Uout1 + Uout2 = 18V-30V

Measuring device of L: W&K 3245			Measuring conditions of L: 50 mV/10 KHz			
Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person: **Uwe Dickhut** Date: **13.07.2004** Design regulation no: **094.929** Index: **00**

PLEASE GIVE US YOUR WRITTEN RELEASE Date Signature