



Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 20/6

Customer part no.:
SKOP243-5-24-22

g:/bv/znt1843.dwg

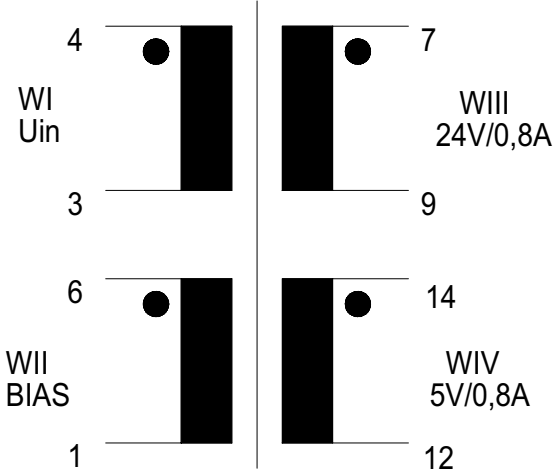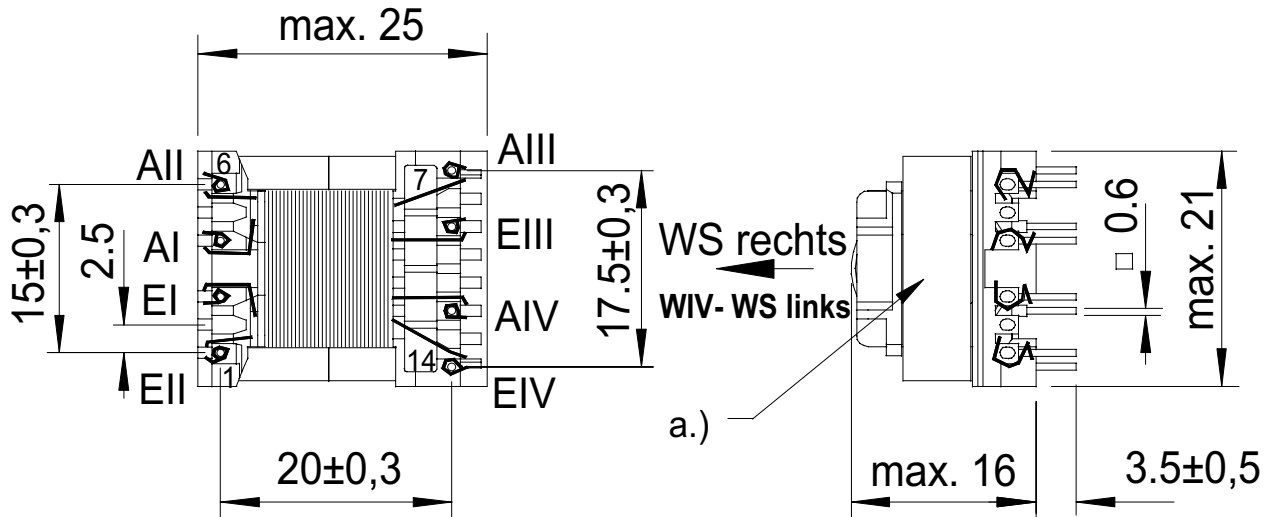

Core / material / air gap / AL	E20/6 K2006 or equiv m.L.0,3	
Nominal inductance	LI = 0,94 mH ± 10%	
maximum transmissible power	22W (TOP243Y - univ.)	
Working frequency	132 kHz	
Transformation ratio	19,8:2,5:4,5:1	
dielctric strength (50Hz/2s)	WI/WII-WIII/WIV = 4 KVeFF/50H	
Nominal Current		
Design in comp. with standard	S08 EN60950	
Working / storage temperature	-25°C- 115°C	-25°C- 85°C
Miscellaneous	f	

Remarks : a.) marking

Measuring device of L: **W&K 3245** Measuring conditions of L: **50 mV/10 KHz**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person: **Uwe Dickhut** Date: **08.01.2004** Design regulation no: **094.930** Index: **00**

PLEASE GIVE US YOUR WRITTEN RELEASE

Date Signature