



Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 20/6

Customer part no.:
SKOP243-5-12-22

gv/bv/zni1843.dwg

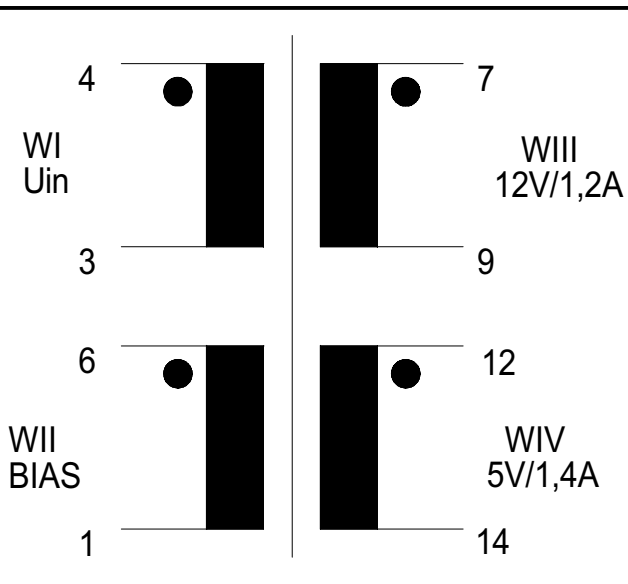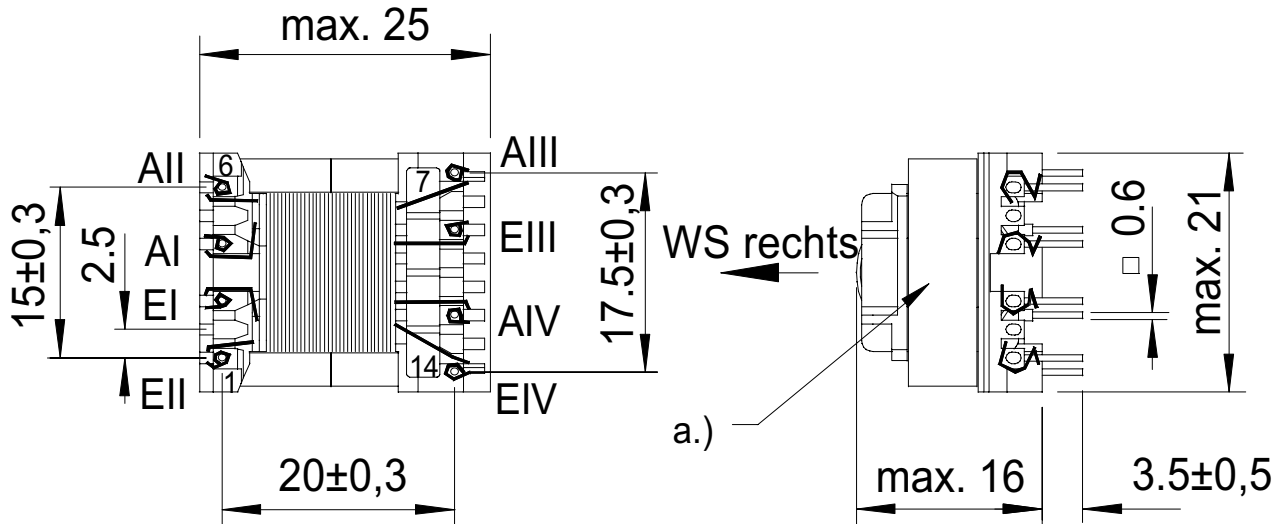

Core / material / air gap / AL	E20/6 K2006 or equiv	
Nominal inductance	LI = 0,94 mH ± 10%	
maximum transmissible power	22W (TOP243Y - univ.)	
Working frequency	132 kHz	
Transformation ratio	79:10:10:6	
dielctric strength (50Hz/2s)	WI/WII-WIII/WIV = 4 KVe_{eff}/50Hz	
Nominal Current		
Design in comp. with standard	S08 EN60950	
Working / storage temperature	-25°C- 115°C	-25°C- 85°C
Miscellaneous		

Remarks : a.) marking

Measuring device of L: W&K 3245				Measuring conditions of L: 50 mV/10 KHz		
Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person: **Uwe Dickhut** Date: **..** Design regulation no: **094.932** Index: **00**

PLEASE GIVE US YOUR WRITTEN RELEASE

Date Signature