



Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 20/6

Customer part no.:
SKNY268-9-14

g:/bv/zni1843.dwg

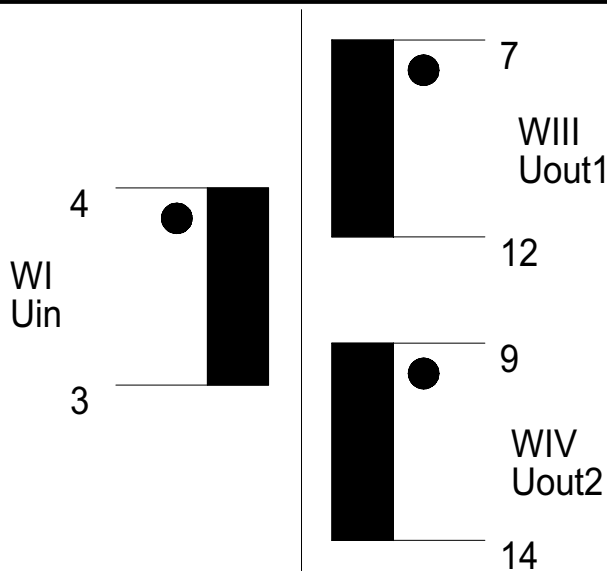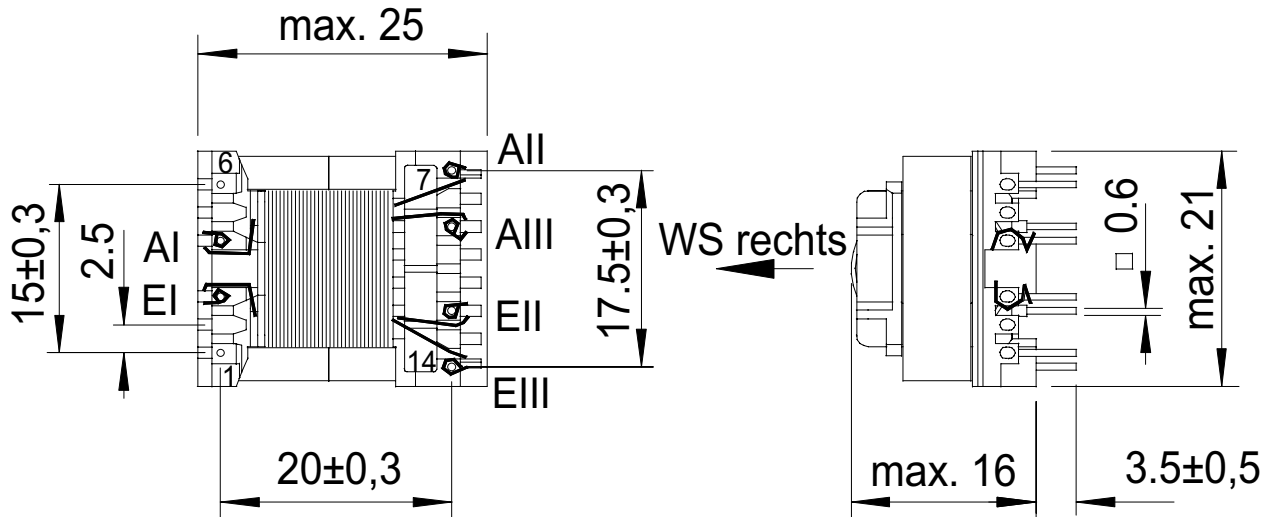

Core / material / air gap / AL	E20/6 K2006 or equiv	
Nominal inductance	LI = 1,16 mH ± 10%	
maximum transmissible power	14W (TNY268 univ.)	
Working frequency	132 kHz	
Transformation ratio	11:1:1	
dielctric strength (50Hz/2s)	WI-WII/WIII=4kVeff/50Hz	
Nominal Current		
Design in comp. with standard	S08 EN60950	
Working / storage temperature	-25°C- 115°C	-25°C- 85°C
Miscellaneous	F (DIN 40040)	

Remarks : a.) marking

Measuring device of L: **W&K 3245**

Measuring conditions of L: **50 mV/10 KHz**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:

Uwe Dickhut

Date:

23.05.2005

Design regulation no:

094.941

Index:

01

PLEASE GIVE US YOUR WRITTEN RELEASE

Date

Signature