



# Technical Data Sheet

Customer:  
**Kaschke Göttingen**

Part designation:  
**SP-E 13/6**

Customer part no.:  
**SLNK363-6-2,8**

dt/bv/zm1864.dwg

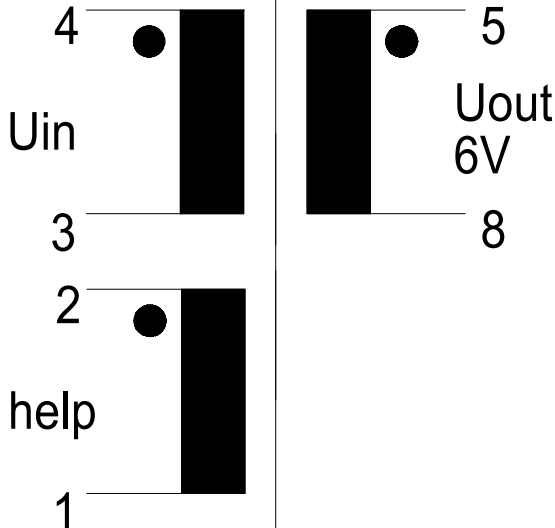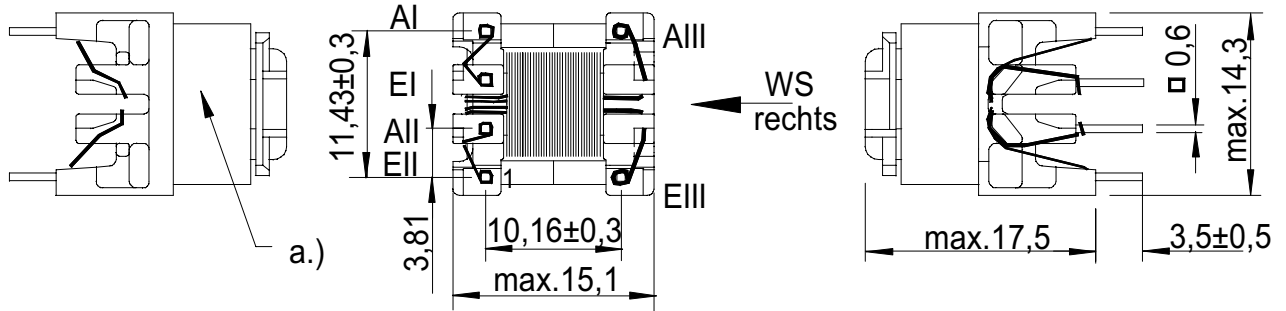

Core / material / air gap / AL	<b>E13/6 K2006 or equiv.</b>	
Nominal inductance	<b>LI= 1,5mH ±10%</b>	
maximum transmissible power	<b>2,8W</b>	
Working frequency	<b>min. 124KHz</b>	
Transformation ratio	<b>128:24:12</b>	
dielectric strength (50Hz/2s)	<b>Prim - Sec: 3,75KV</b>	
Nominal Current		
Design in comp. with standard	<b>S08</b>	
Working / storage temperature	<b>-25°C- +120°C</b>	<b>25°C- +85°C°C</b>
Miscellaneous	<b>F(DIN40040)</b>	
leakage inductance	<b>max. 90µH</b>	

Remarks : a.) marking  
switcher: PI-LINK363

Measuring device of L: **W&K 3260A**

Measuring conditions of L: **50mV/10kHz/25°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person:  
**Uwe Dickhut**

Date:  
..

Design regulation no:  
**096.940**

Index:  
**a**

**PLEASE GIVE US YOUR WRITTEN RELEASE**

Date

Signature