



Technical Data Sheet

 Customer:
KASCHKE UK (GB)

 Part designation:
SP-E 13/6

 Customer part no.:
SLNK363-12-4

d:/bv/zn1864.dwg

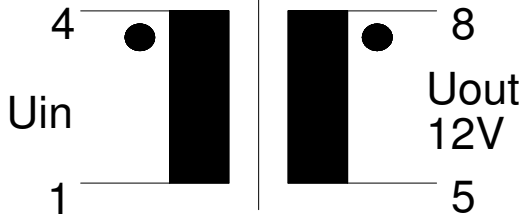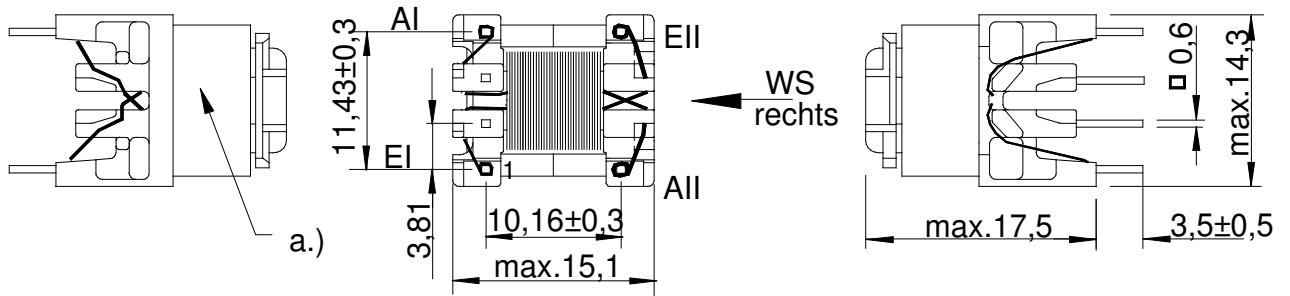

Core / material / air gap / AL	E13/6 K2006 or equiv.	
Nominal inductance	LI= 2,4mH $\pm 15\%$	
maximum transmissible power	4W	
Working frequency	min. 124KHz	
Transformation ratio	167:17	
dielectric strength (50Hz/2s)	Prim - Sec: 3,75KV	
Nominal Current		
Design in comp. with standard	.	
Working / storage temperature	-25 °C- +120 °C	-25 °C- +85 °C
Miscellaneous	F(DIN40 040)	

 Remarks : **a.) marking**

 Measuring device of L: **W&K 3260A**

 Measuring conditions of L: **50mV/10kHz/25 °C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5
LI	mH	min.	2,34	max.	2,65	
Lleak	μH	min.	82,5	max.	92,7	

Responsible person:

Markus Häpe

Date:

19.03.2008

Design regulation no:

096.941

Index:

a
PLEASE GIVE US YOUR WRITTEN RELEASE

Date

Signature