
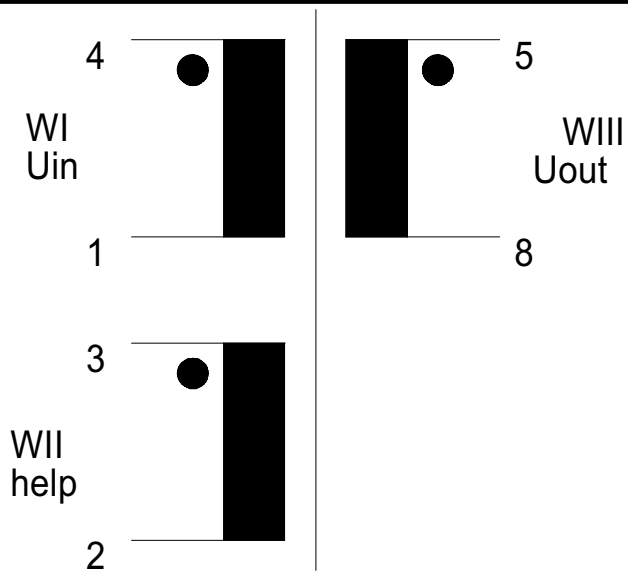


Technical Data Sheet

Customer:
KASCHKE UK (GB)

Part designation:
SP-EFD 20

Customer part no.:
DPA426 / 20W

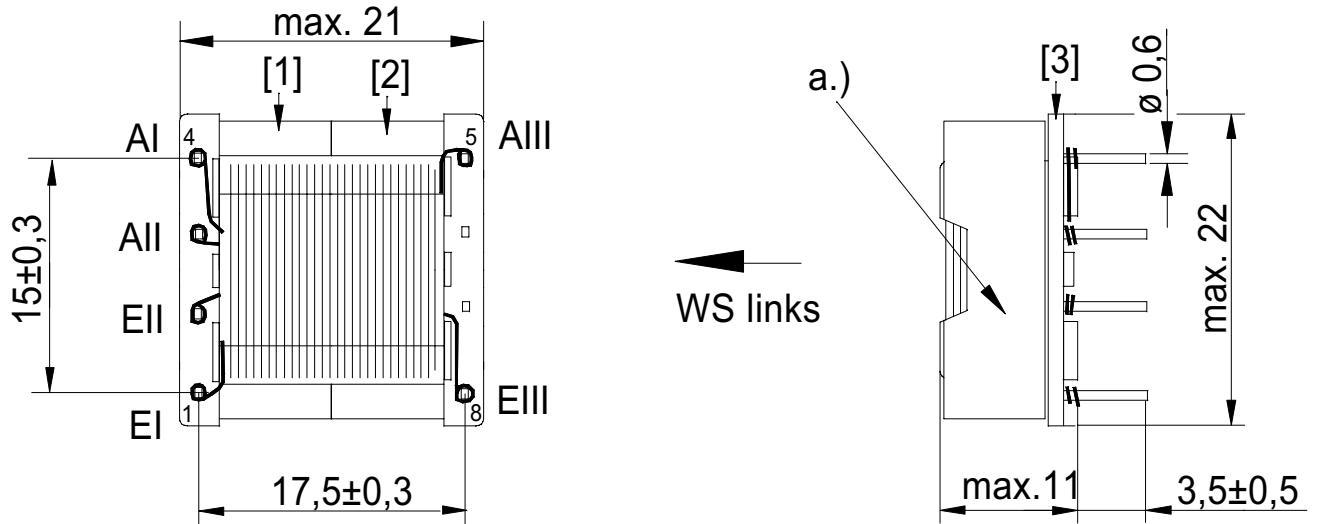

Core / material / air gap / AL	EFD20 / K2008 or equiv.	
Nominal inductance	LI = 27µH ± 15%	
maximum transmissible power	20W	
Working frequency	400kHz	
Transformation ratio	10 : 4 : 4	
dielectric strength (50Hz/2s)	0,5kV (WI/WII - WIII)	
Nominal Current		
Design in comp. with standard	I08	
Working / storage temperature	-25°C- +125°C	-25°C- +85°C
Miscellaneous	F (DIN 40040)	

Remarks : a.) marking at series production.

Measuring device of L: W&K 3260A		Measuring conditions of L: 50mV/10KHz/21,5°C				
Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5
LI	µH	28,8	26,5	28,2	28,2	27,3
LII	µH	4,63	4,26	4,51	4,53	4,40
LIII	µH	4,68	4,31	4,54	4,48	4,36
Ls	µH	0,46	0,44	0,46	0,45	0,46
RI	mOhm	14,4	14,4	14,4	14,4	14,4
RII	mOhm	86,1	85,8	84,1	84,0	84,9
RIII	mOhm	7,28	7,26	7,28	7,29	7,29

Responsible person: Uwe Dickhut	Date: ..	Design regulation no.: 184.264	Index: a
---	-------------	--	--------------------

PLEASE GIVE US YOUR WRITTEN RELEASE

Date Signature